










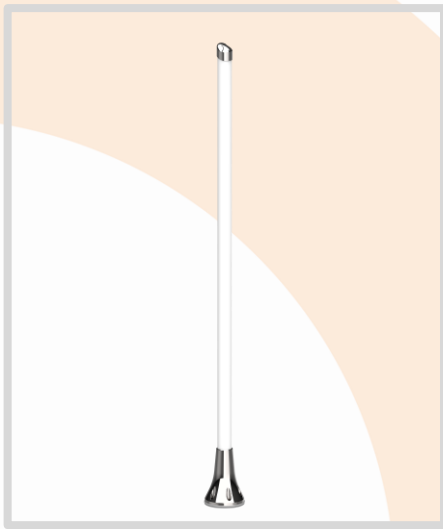



ANTENNAS | OMNI-904 SERIES

HIGH GAIN, OMNI-DIRECTIONAL, 4x4 MIMO LTE/5G ANTENNA

617 – 4200 MHz, 3 dBi & 8 dBi



 617 – 960 MHz 1427 – 1517 MHz 1710 – 2700 MHz 3400 – 4200 MHz	 3dBi & 8 dBi	 Increase X Mb/s	 Omni- Directional	 4G LTE	 5G
 BAND 71	 3.5 GHz CBRS	 -40°C to +80°C	 Salt Spray Protection	 4x4 MIMO	 IP 68



APPLICATION AREAS

- High performance, omni-directional marine & coastal antenna
- 4x4 MIMO capability for improved performance
- Combination of low & high gain omni-directional antennas
- Covers contemporary LTE/5G bands from 617 to 4200 MHz
- UV and saltwater protected for marine and coastal conditions
- Robust and all-weather proof for harsh conditions at sea (IP 68)
- Optional 316 stainless steel mounting bracket available

Product Overview

The OMNI-904 is a high gain, ultra-wideband antenna, which covers all contemporary LTE/5G frequency bands with excellent balanced gain across all frequencies from 617 to 4200 MHz. The antenna offers 4x4 MIMO capability from its vertically separated radiating elements, all in the same single radome. The antenna design combines two low gain and two high gain omni-directional antennas, which allows for superior pattern control over the entire frequency range. This unique combination of low and high gain omni-directional antennas makes the OMNI-904 a true omni-directional 4x4 MIMO antenna, suitable for marine and coastal applications.

The antenna comes with an IP68 protection rating against dust and water ingress, making it ideal for most severe storms at sea. The radome is also fully salt water protected so that it can be used in highly corrosive environments, thanks to the fiberglass radome material. The OMNI-904 guarantees signal reception almost everywhere and is usable in all part of the world. The ultra-wideband performance makes the antenna future proof, as it covers LTE Band 71 (617 to 698 MHz) as well as the CBRS bands from 3400 to 4200 MHz for inland use.

Features

- High performance, 4x4 MIMO omni-directional antenna
- Wideband antenna for LTE/5G (617 to 4200 MHz)
- Includes Band 71 (617 to 698 MHz) and 3.5 GHz 5G band
- Robust and weather resistant enclosure with IP 68 rating
- UV and salt-water resistant enclosure

Application Areas


- Marine applications: Super Yachts / Boats / Ferries
- Enhanced LTE/4G and 5G reception
- Increase system transmission reliability
- High-end industrial grade router applications
- Industrial and commercial LTE/5G deployment
- Agricultural and farming LTE/5G data distribution



OMNI-904

Frequency Band

The OMNI-904 is an omni-directional antenna that works from 617 – 960 MHz | 1427 – 1517 MHz | 1710 – 2700 MHz | and | 3400 – 4200 MHz |

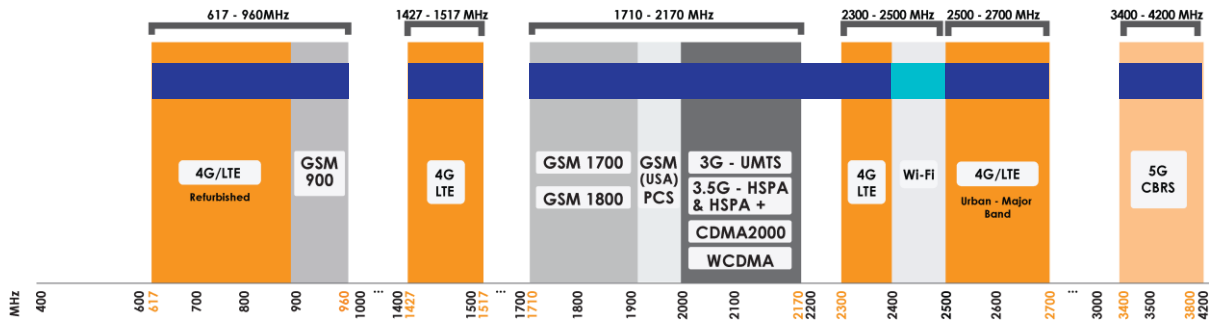

Indicates the LTE bands on which OMNI-904 works Indicates the WI-FI bands on which OMNI-904 works

Antenna Derivatives

Product Order Code (SKU)	OMNI-0904-V1-01	OMNI-0904-V1-02
Ports	4	4
Coax Cable Type	Twin HDF 195	N/A
Coax Cable Length	2m	N/A
Connector Type	N-Type (F)	N-Type (F)
Product Weight	4.88 kg	4.72 kg
Packaged Weight	7.88 kg	7.80 kg
Packaged Dimensions	1710 x 180 x 210 mm	1710 x 180 x 210 mm
EAN	6009710924198	6009710924891

**The coax cable & connector are factory mounted to the antenna*

Electrical Specification

Frequency Bands:	617 – 960 MHz 1427 – 1517 MHz 1710 – 2700 MHz 3400 – 4200 MHz
Gain (Max): Port 1 & 2	6 dBi @ 617 – 960 MHz 6 dBi @ 1427 – 1517 MHz 8 dBi @ 1710 – 2700 MHz 5 dBi @ 3400 – 4200 MHz
Gain (Max): Port 3 & 4	1 dBi @ 617 – 960 MHz 0 dBi @ 1427 – 1517 MHz 3 dBi @ 1710 – 2700 MHz 0 dBi @ 3400 – 4200 MHz
Gain (Mean): Port 1 & 2	3 dBi @ 617 – 960 MHz 2 dBi @ 1427 – 1517 MHz 6 dBi @ 1710 – 2700 MHz 3.5 dBi @ 3400 – 4200 MHz
Gain (Mean): Port 3 & 4	0 dBi @ 617 – 960 MHz -2 dBi @ 1427 – 1517 MHz 2 dBi @ 1710 – 2700 MHz -2 dBi @ 3400 – 4200 MHz
VSWR:	Port 1 & 2: $\leq 2.5:1$ (Across 90% of the bands) Port 3 & 4: $<2.5:1$
Feed Power Handling:	10 W
Input Impedance:	50 Ohm (nominal)
Polarisation:	Linear Vertical
Coax Cable Loss:	0.385 dB/m @ 900 MHz 0.507 dB/m @ 1500 MHz 0.565 dB/m @ 1800 MHz 0.788 dB/m @ 3000 MHz
DC Short:	Yes

Product Box Content

Antenna:	A-OMNI-0904
Mounting Bracket:	Wall/Pole Mount Bracket

Mechanical Specification

Product Dimensions	1654 mm x Ø145 mm (Incl. Mounting Base)
Radome Material:	Fiberglass with 316 Stainless Steel Caps
Radome Colour:	Brilliant White Pantone P 179-1C
Mounting Type:	Pole, Wall and Surface Mounted


Environmental Specifications, Certification & Approvals

Wind Survival:	<190 km/h
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Outdoor/Indoor
Water Ingress Protection Ratio/Standard:	IP 68
Salt Spray:	MIL-STD 810G/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Enclosure Flammability Rating:	UL 94-HB
Impact Resistance:	IK 10
Product Safety & Environmental:	Complies with CE and RoHS standards



Antenna Performance Plots

VSWR: Cell 1 & 2 Main

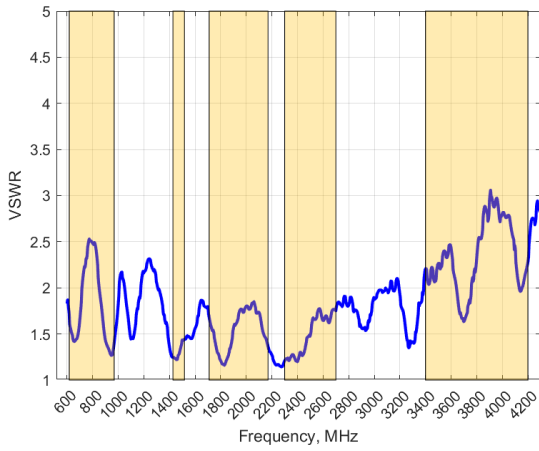


Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-904 delivers superior performance across all bands with a VSWR of 2.5:1 or better across 90% of the bands.

**VSWR measured with a 2m low loss cable.*

VSWR: Cell 1 & 2 Aux

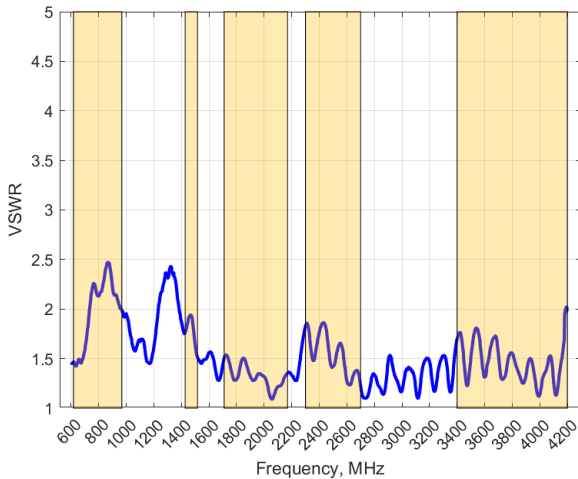


Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-904 delivers superior performance across all bands with a VSWR of 2.5:1 or better.

**VSWR measured with a 2m low loss cable.*

GAIN (EXCLUDING CABLE LOSS): Cell 1 & 2 Main

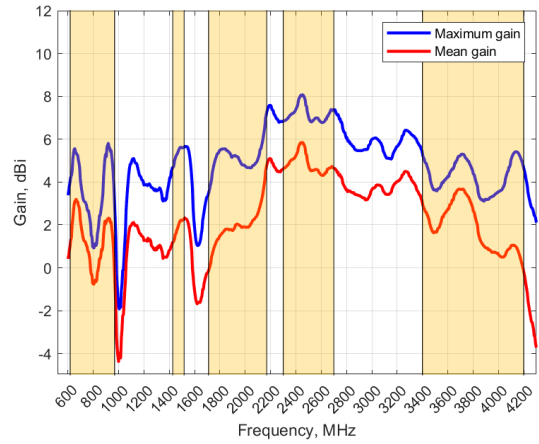


Gain* in dBi

8 dBi is the peak gain across all bands from 617 – 4200 MHz

Gain @ 617 – 960 MHz (Max; Mean):	6 dBi; 3 dBi
Gain @ 1427 – 1517 MHz (Max; Mean):	6 dBi; 2 dBi
Gain @ 1710 – 2700 MHz (Max; Mean):	8 dBi; 6 dBi
Gain @ 3400 – 4200 MHz (Max; Mean):	5 dBi; 3.5 dBi

**Antenna gain measured with polarisation aligned standard antenna*

GAIN (EXCLUDING CABLE LOSS): Cell 1 & 2 Aux

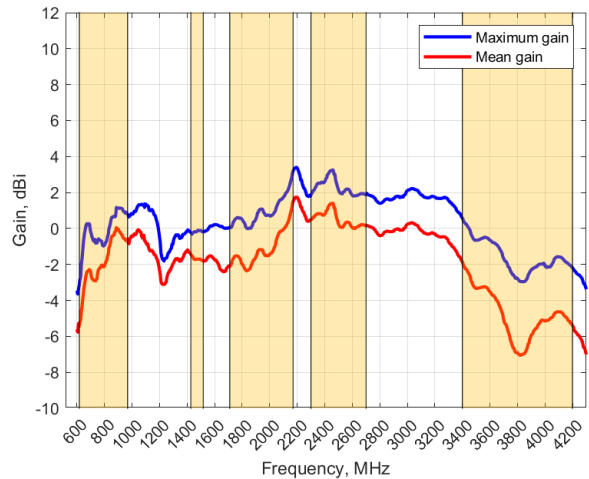


Gain* in dBi

3 dBi is the peak gain across all bands from 617 – 4200 MHz

Gain @ 617 – 960 MHz (Max; Mean):	1 dBi; 0 dBi
Gain @ 1427 – 1517 MHz (Max; Mean):	0 dBi; -2 dBi
Gain @ 1710 – 2700 MHz (Max; Mean):	3 dBi; 2 dBi
Gain @ 3400 – 4200 MHz (Max; Mean):	0 dBi; -2 dBi


**Antenna gain measured with polarisation aligned standard antenna*

Technical Drawings

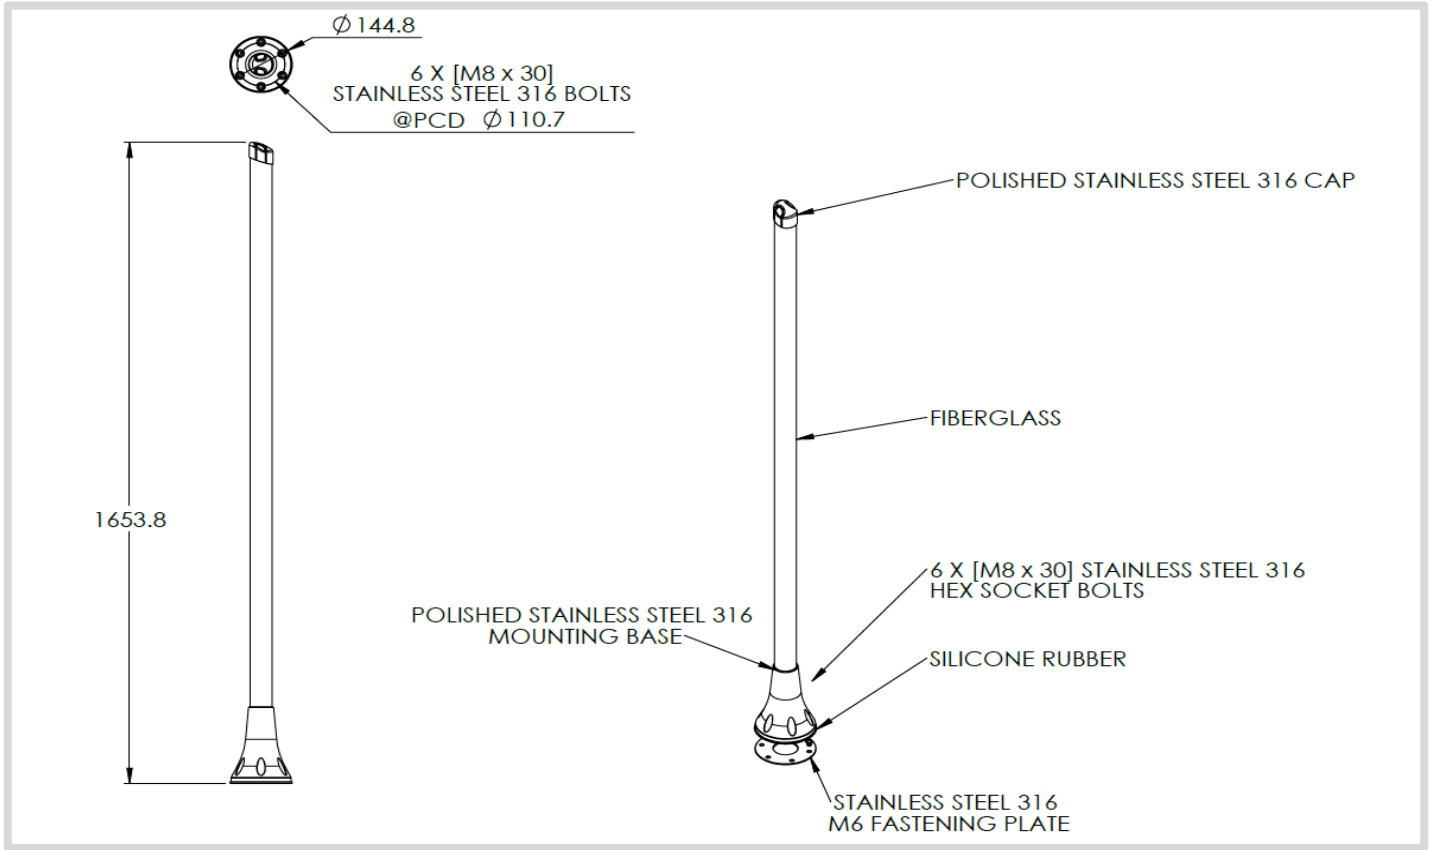


Radiation Patterns: Port 1 & 2


Azimuth: 617 – 968 MHz

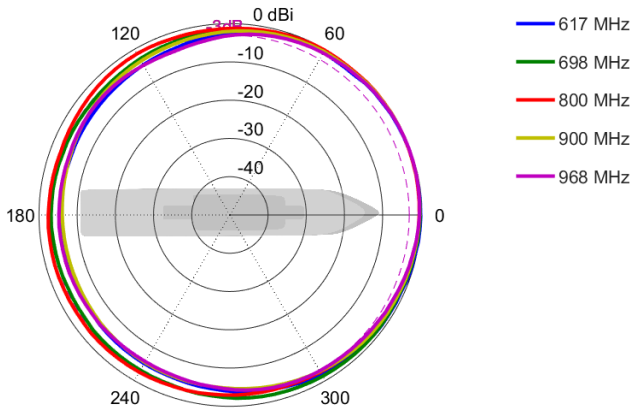


Azimuth: 1427 – 1517 MHz

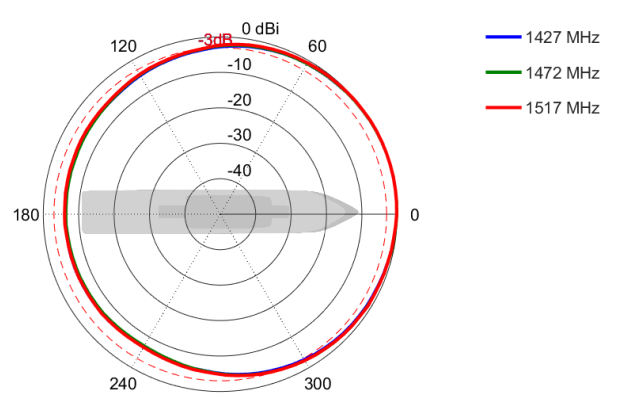


Azimuth: 1710 – 2170 MHz

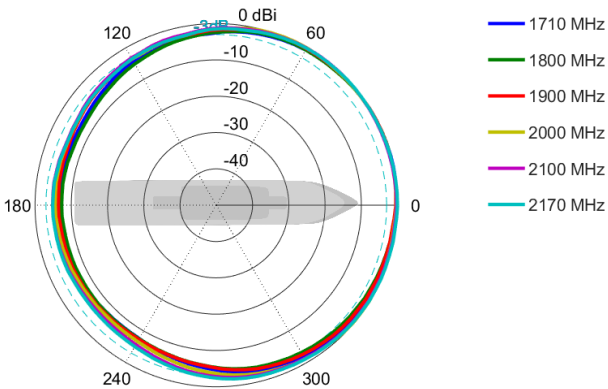


Azimuth: 2300 – 2700 MHz

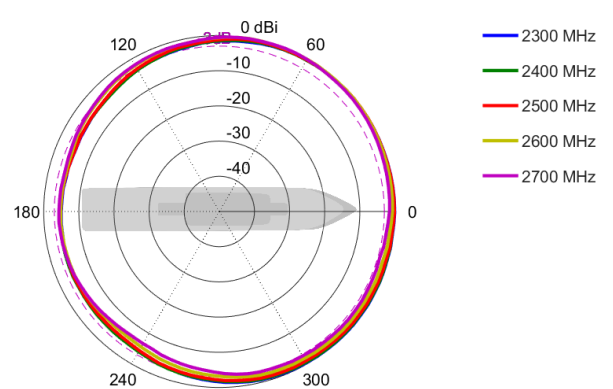


Azimuth: 3400 – 4200 MHz

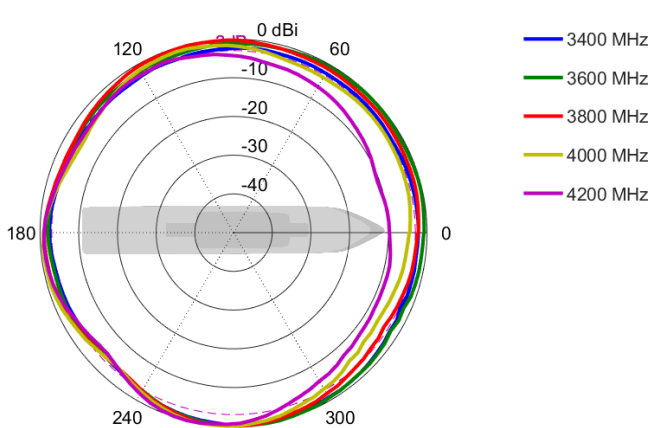


Elevation: 617 – 968 MHz

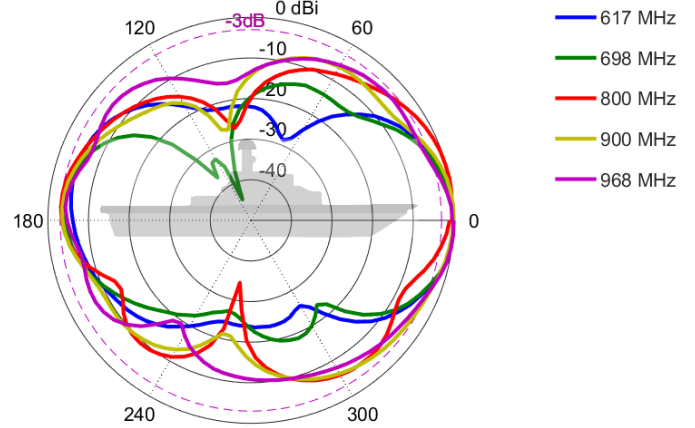


Elevation: 1427 – 1517 MHz

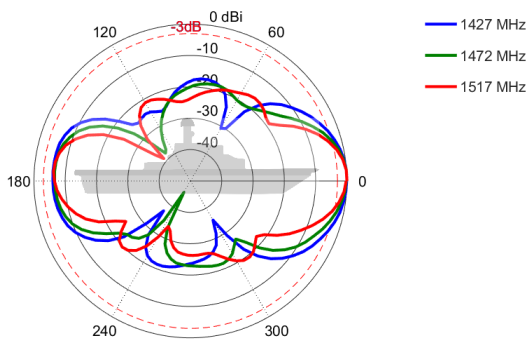


Elevation: 1710 – 2170 MHz

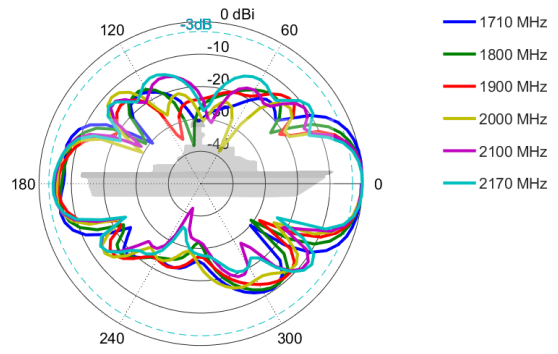

Elevation: 2300 – 2700 MHz

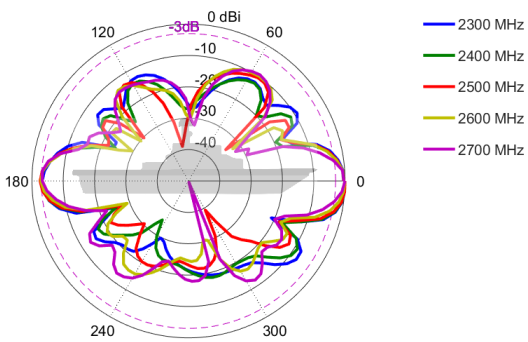


Elevation: 3400 – 4200 MHz

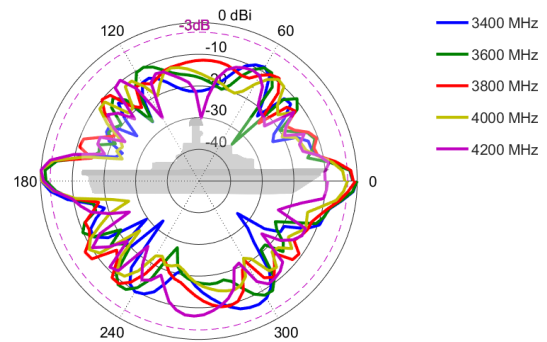


Radiation Patterns: Port 3 & 4


Azimuth: 617 – 968 MHz

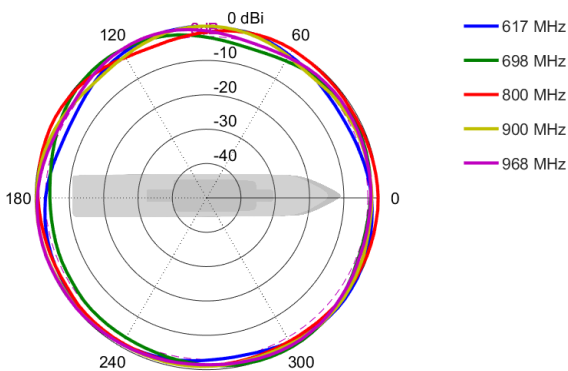


Azimuth: 1427 – 1517 MHz

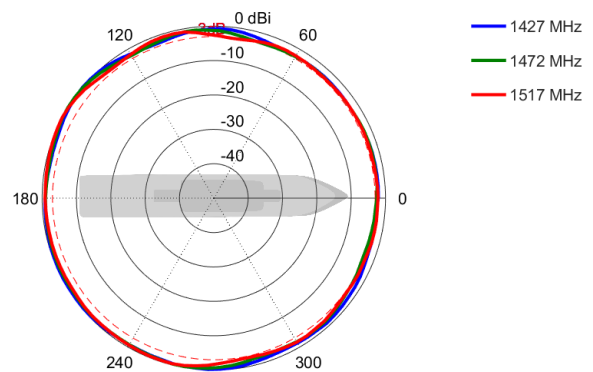


Azimuth: 1710 – 2170 MHz

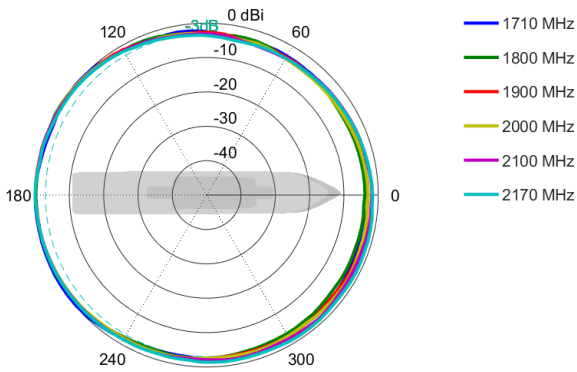


Azimuth: 2300 – 2700 MHz

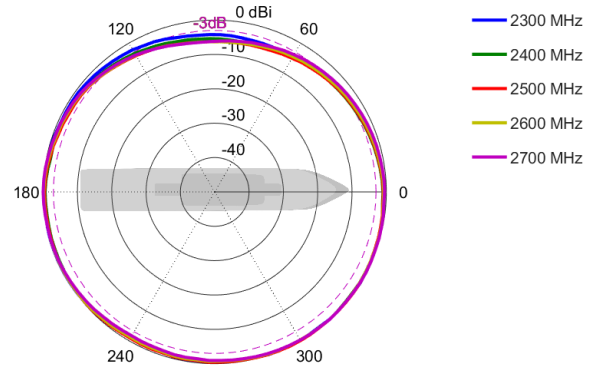


Azimuth: 3400 – 4200 MHz

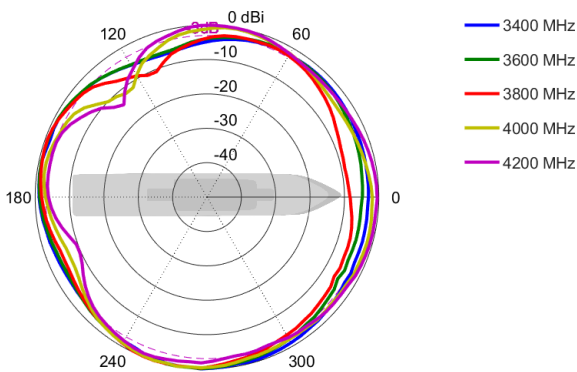


Elevation: 617 – 968 MHz

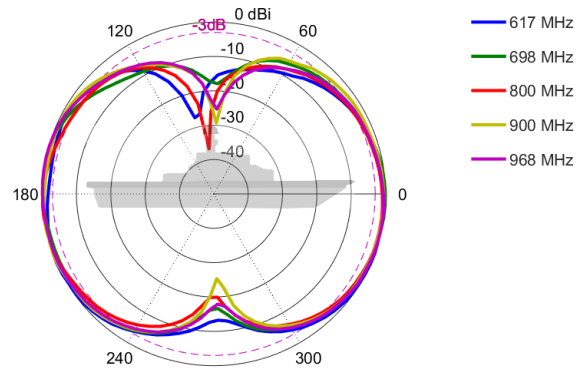

Elevation: 1427 – 1517 MHz

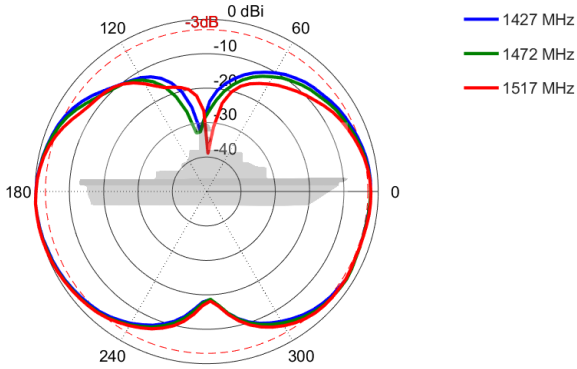


Elevation: 1710 – 2170 MHz

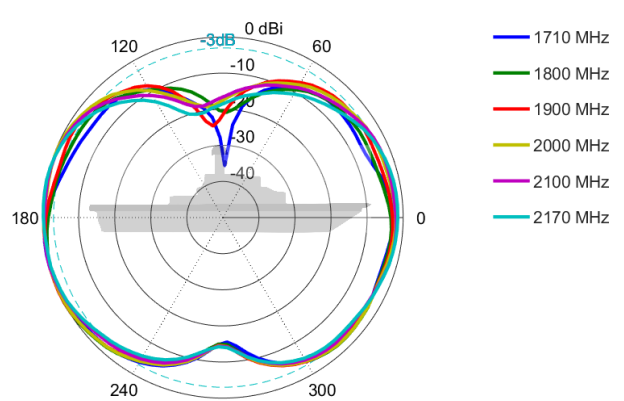


Elevation: 2300 – 2700 MHz

Elevation: 3400 – 4200 MHz

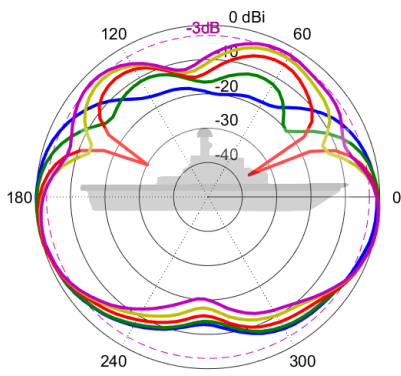

- 2300 MHz
- 2400 MHz
- 2500 MHz
- 2600 MHz
- 2700 MHz

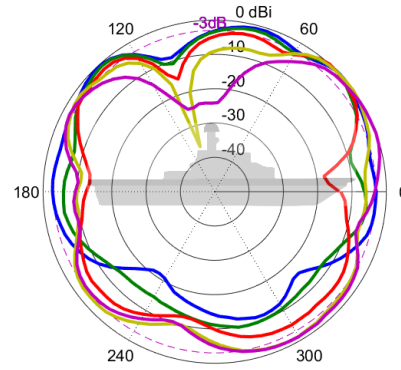

- 3400 MHz
- 3600 MHz
- 3800 MHz
- 4000 MHz
- 4200 MHz

Mounting Options



Surface Mount

Surface mount using included base and mounting plate



Pole Mount


Pole mount using optional A-BRKT-090 (Not included)



Wall Mount

Wall mount using optional A-BRKT-090 (Not included)

Additional Accessories



BRKT-90

Narwhal Series Marine Bracket, 316 Stainless Steel

See accessories technical specifications on www.poynting.tech

CONTACT POYNTING

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park,
Landmarks Avenue,
Samrand, 0157, South Africa

Phone: +27 (0) 12 657 0050

E-mail: info@poynting.tech

International Email: sales-global@poynting.tech

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 7453 9002

E-mail: sales-europe@poynting.tech

Poynting USA

1804 Owen Court, Suite 104,
Mansfield,
TX 76063
USA

Phone: +1 817 533-8130

E-mail: sales-us@poynting.tech